

The Niagara Universal range are twin impeller centrifugal shower pumps designed for domestic shower and bathroom applications.

Fitted with long life seals and supplied with high quality braided connection hoses and filter washers.

The Niagara Universal shower pump will work automatically in either positive or negative head installations.

Choose from 1.5 and 2.0 bar pressure.

FEATURES

- WRAS compliant
- Enclosure class - IPX2 rated
- Max liquid temperature 60°C
- Motor fitted with an auto resetting thermotrip
- Anti vibration feet
- Inlet filters
- Flexible hoses with 22mm push-fit pipe connections
- 2 year warranty




PRODUCT DATA

Data	Pump type	
	STC-1.5 CN	STC-2.0 CN
Supply voltage	1 x 230 V, 50 Hz	
Power consumption	270 W	350 W
Rated current	1.5 A	1.8 A
Rating*	20 min. on / 40 min. off	
Enclosure class**	IPX2	
Motor	Universal	
Inlet head (min. - max.)	2 to 8 m	
Maximum developed pump head	15 m	20 m
Maximum operating pressure	3.0 bar	
Minimum starting flow rate	0.5 l/min.	
Length	300 mm	305 mm
Width	215 mm	215 mm
Height	256 mm	256 mm
Weight	5.8 kg	6.2 kg
Sound pressure level (1 m)	< 70 dB(A)	

* At flow rates between 5 and 20 l/min.

** When mounted on a flat horizontal surface.

NIAGARA UNIVERSAL PUMP RANGE – PERFORMANCE CURVE

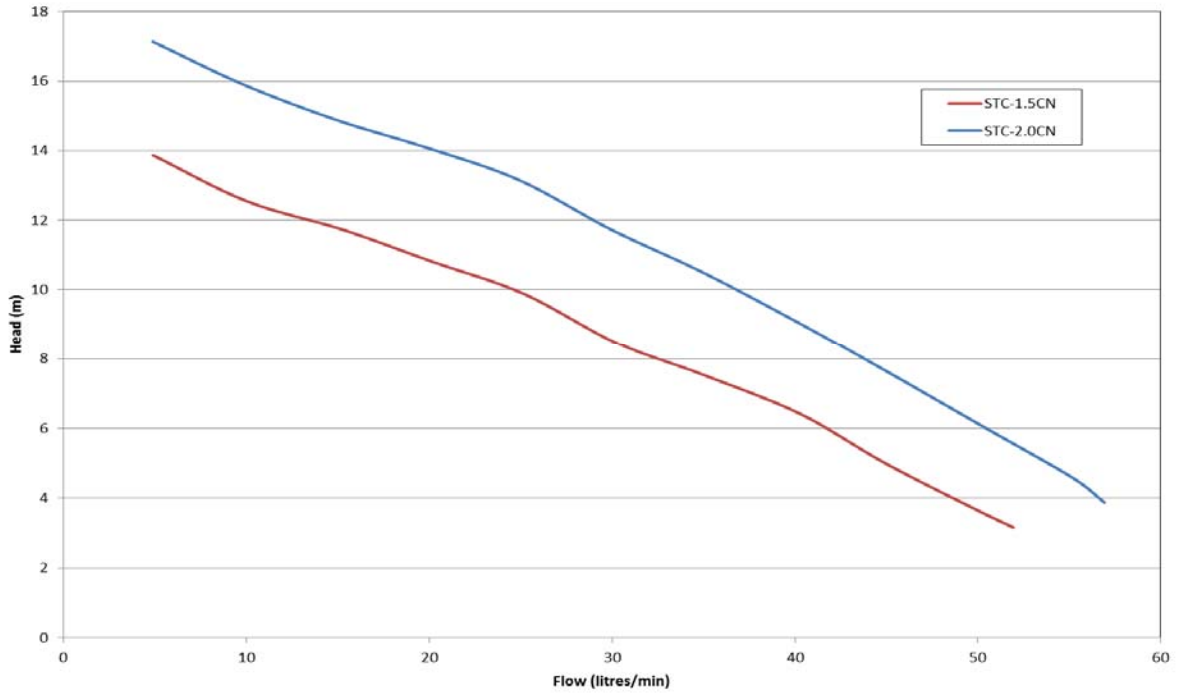

RECOMMENDED PUMP INSTALLATION

