

## APPLICATIONS



Boiler



Air conditioning



Air conditioner unit with ceiling cassette



Refrigerated display case



Dehumidifier

## PUMPING DISTANCE

4,5 m  
50 m

## WARRANTY



Product code :  
EAN 3308815083674  
SK6



**NEW  
2021**

# Sanicondens® Pro v02




**Flexibility:** can be used with gas or oil boilers (using Sanineutral or Sanineutral mini) floor and wall boilers, air conditioning units, dehumidifiers, refrigerated display cases.

### Easy installation:


Complete installation kit supplied with non-return valve and alarm pre-connection.

Compact design


Quiet operation



## SEMI-TRANSPARENT VIEW

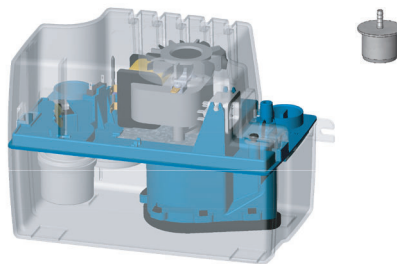

## PUMP CURVE

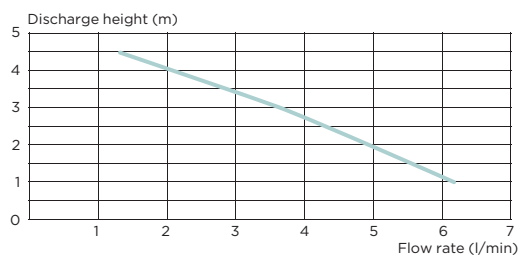

## PACKAGING

Sanicondens® Pro v02

Check valve supplied

**Comes with:** fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (5m) and 1 power cable of 1.5m, 1 rubber stopper, 1 alarm pre-connection cable

## TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlet	2
Ø discharge pipework	10 mm
Tank volume	2,2l
Maximum flow	6,2 l/min
Maximum incoming water temperature	80°C (S3 15 %)
Max power of gas boiler	50 kW
Max power of oil boiler	30 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Max current	0,52 A
Electrical class	I
IP rating	IP20
Weight	2 kg
Low level noise	< 45 dB(A)

ORIGINE  
FRANCE®  
GARANTIE

BVCert. 6045364

