

Sanivite +



5 m
50 m



PRODUCT BENEFITS

- Pump suitable for installing in a kitchen or utility room
- Low noise level
- Low activation level
- Activated carbon filter included

CONNECTIONS

← Discharge diameter ext. : 32 mm

→ External inlet diameter : 40 mm



TECHNICAL FEATURES

| | |
|-------------------------------------|----------------------------------|
| Number of inlets | 4 |
| External inlet diameter | 40 mm |
| Discharge diameter ext. | 32 mm |
| Max. incoming temperature | 60°C intermittently (max. 5 min) |
| Min. shower tray height | 150 mm |
| Activation level | 95 mm |
| Voltage / Frequency | 220-240 V / 50-60 Hz |
| Motor power | 400 W |
| IP Rating | IP44 |
| Electrical class | I |
| Noise level | 42 dB(A) |
| Identification and logistics | |
| Gross weight | 6 kg |
| EAN code | 3308815074085 |
| Product code | 6004 |

PACK CONTAINS


Sanivite +, non-return valve, connectors, activated carbon filter included to neutralise odours

OPTIONAL EXTRAS

Sanialarm
Barcode: 3308810042799
Product code: 1095



CURVE

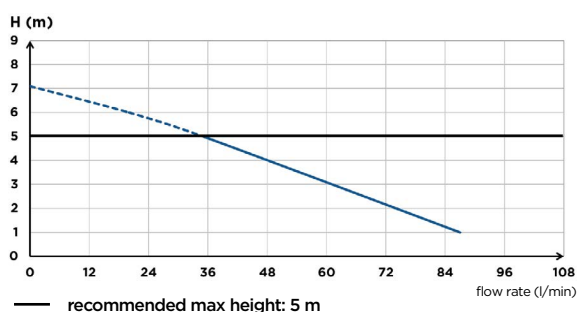

DIMENSIONS

