

Customer	Date	2014-07-15
Contact	Project	
Phone number	Project no.	
Email		



1HM06P07T5RVBE
104600050

Operating data

Pump type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	K 277
Nominal flow	l/s 0.6511	pH-value at t A	7
Nominal head	m 34	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	K 293	Solids	0
Available system NPSH	m 0	Altitude	m 1000

Pump data

Make	Lowara	Nominal	l/s .7 (.7)
Speed	1/min 2900	Flow	Max- l/s .7
Number of stages	6		Min- l/s
Max. casing pressure	kPa	Nominal	m 34.7
Max. working pressure	kPa 679.7	Head	at Qmax m 34.2
Head H(Q=0)	m 69		at Qmin m 69.3
Weight	kg 13	Shaft power	kW .7 (.7)
	Max. mm 73	Max. shaft power	kW .7
Impeller R	designed mm 73	Efficiency	% 31.88
	Min. mm 73	NPSH 3%	m 4

Pump Materials

Adapter	Aluminium
Bolts and screws	Stainless steel
Diffuser	Stainless steel
Fill / drain plugs	Nickel-plated brass
impeller	Technopolymer (Noryl™)
Pump body	Stainless steel
Shaft	Stainless steel
Wear ring	Technopolymer (PPS)

Shaft Seal

Mechanical Seal	Roten
HM - uniten	
Rotating Assembly	V-Ceramic Alumina
Fixed Assembly	B-Carbon
Elastomers	E-EPDM
Springs	G-AISI 316
Other Components	G-AISI 316

Seal casing Stainless steel

Motor data

Manufacturer	Lowara	Electric voltage	400 V	Speed	2895 1/min	Insulation class	F
Specific design	IE3 Three phase surface motor - e-HM			Frame size	56	Colour	RAL 5010
Type	SM80HM../307 E3	Electric current	1.7 A	Weight	0 kg		
Rated power	0.75 kW	Degree of protection	IP 55				

Remarks:



Customer	Date	2014-07-15
Contact	Project	
Phone number	Project no.	
Email		

1HM06P07T5RVBE

104600050


Hydraulic Data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0.651 l/s	Flow	0.658 l/s	Impeller R	73 mm
Head	34 m	Head	34.7 m	Frequency	50 Hz
Static head	0 m			Speed	2900 1/min

Power data referred to:

Water, pure [100%]; 277K; 1000kg/m³; 1.57mm²/s


Performance according to ISO 9906 - Annex A

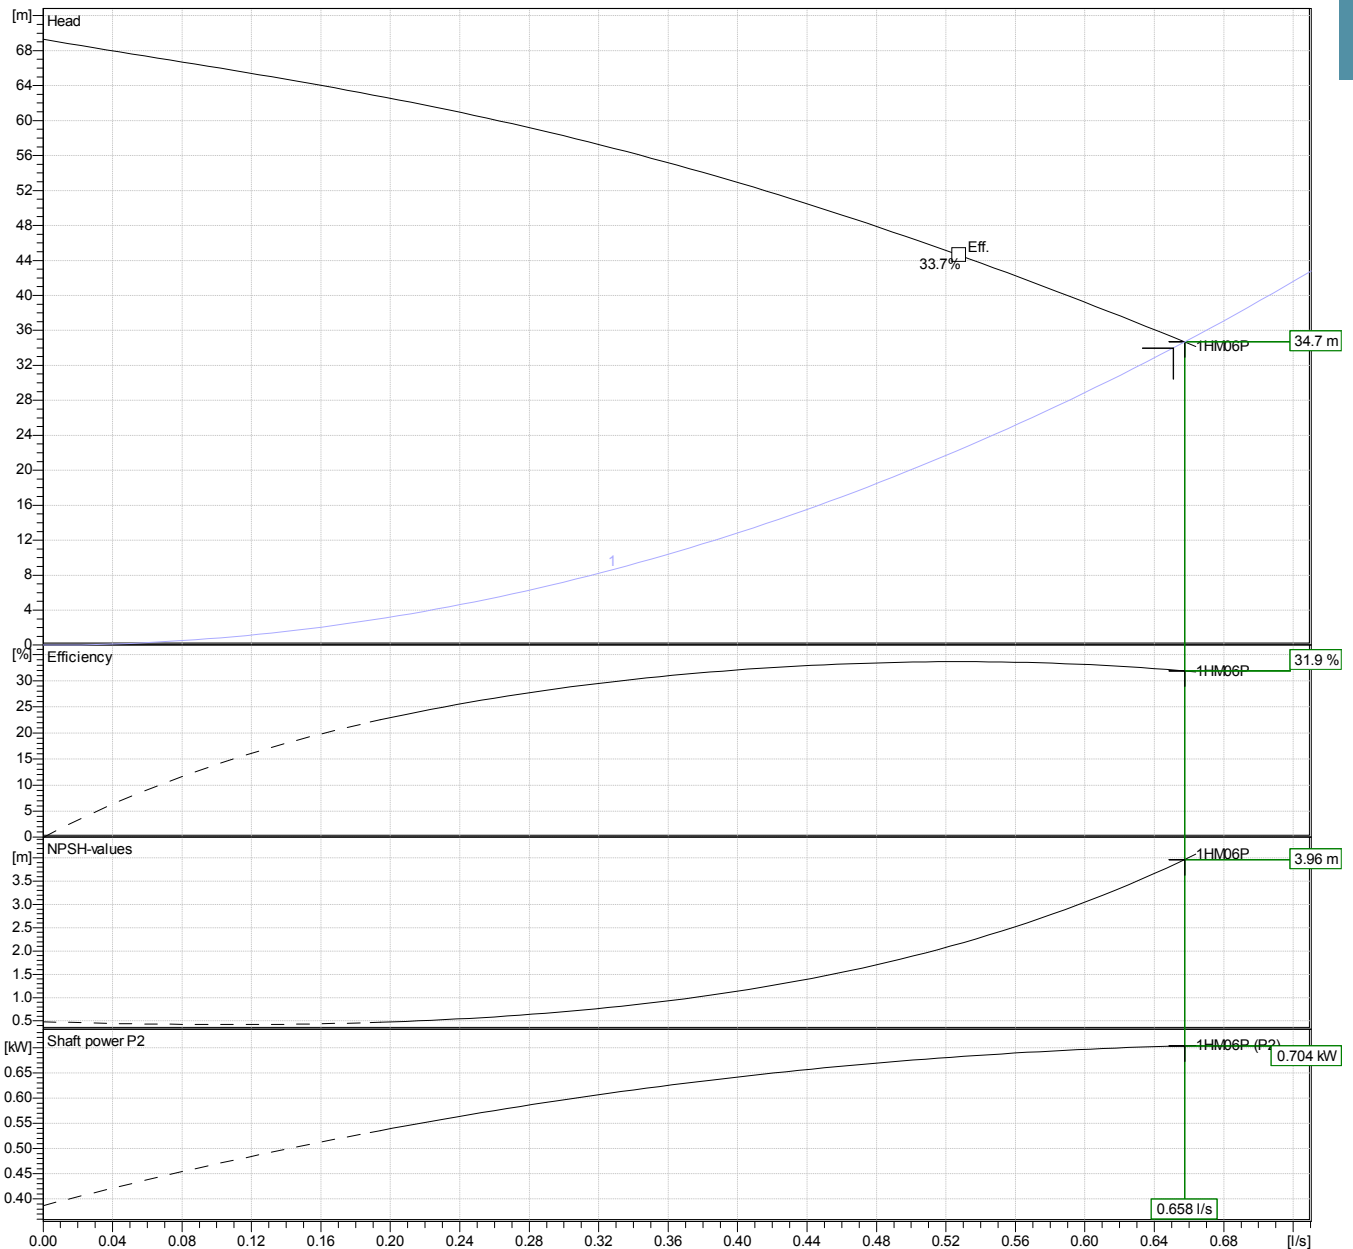

Customer	Date	2014-07-15
Contact	Project	
Phone number	Project no.	
Email		

1HM06P07T5RVBE
104600050

Drawing

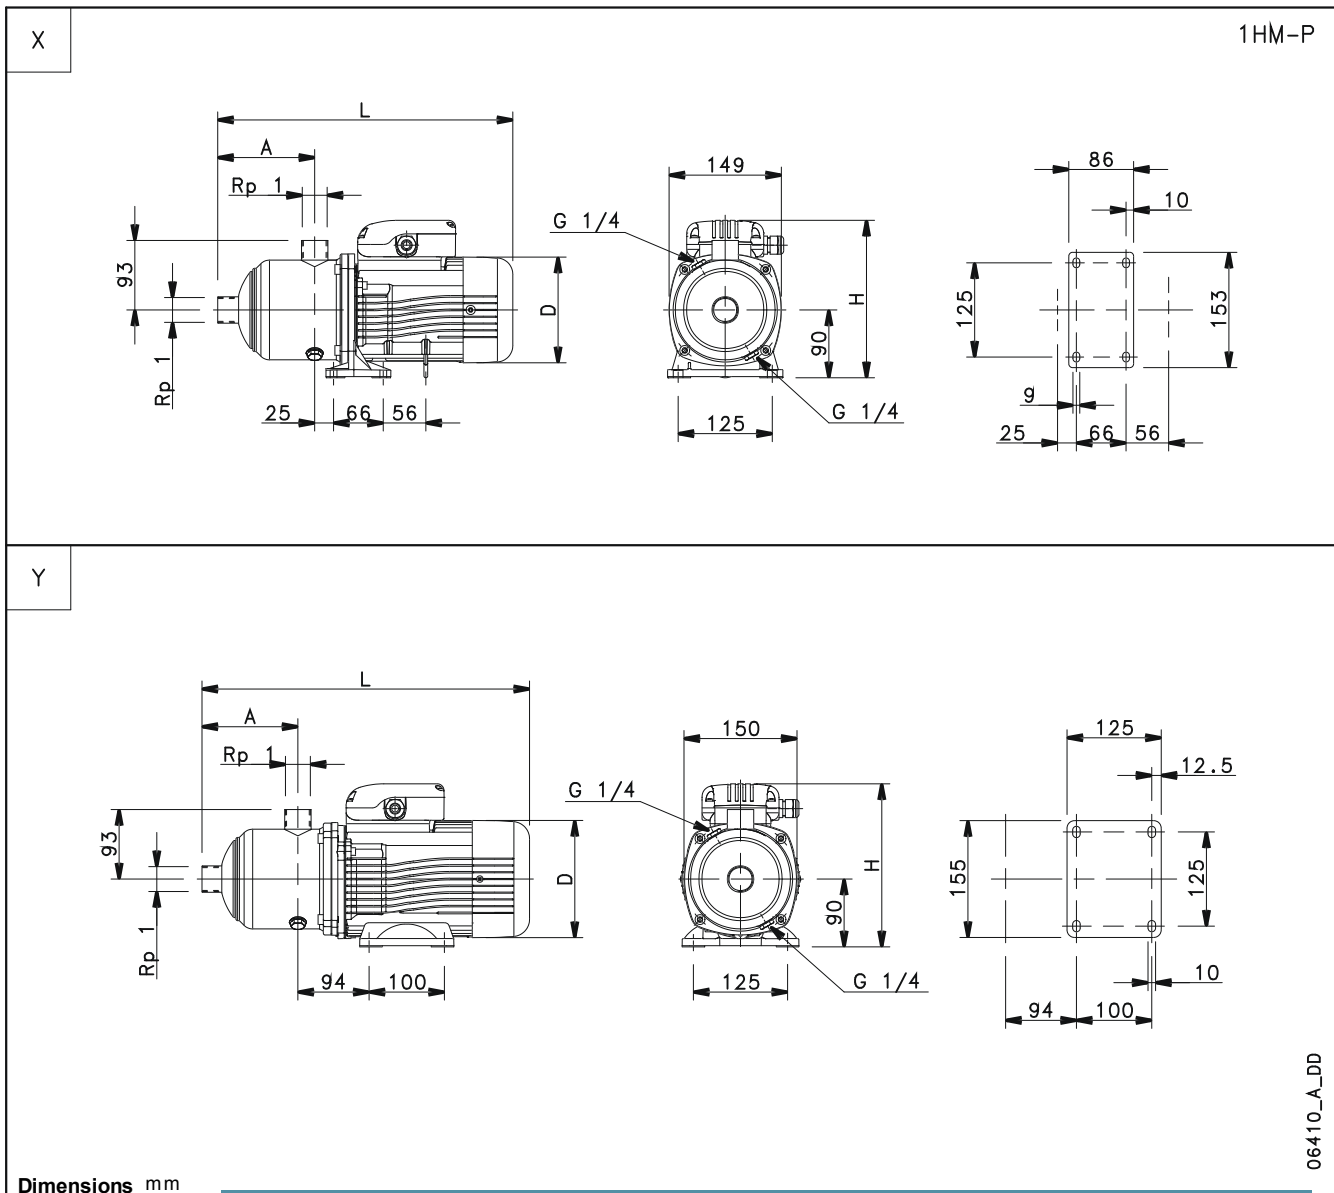

06410_A_DD

A	147							Weight	
D	155							13	kg
Drawing	Y								
H	219								
L	455								
PN	10								